




Product Features


- Single hole installation
- Aerated flow rate ~ 2.2 gpm @60 psi
- Includes pop-up drain assembly with overflow

Code compliance

- ADA

Available Finishes

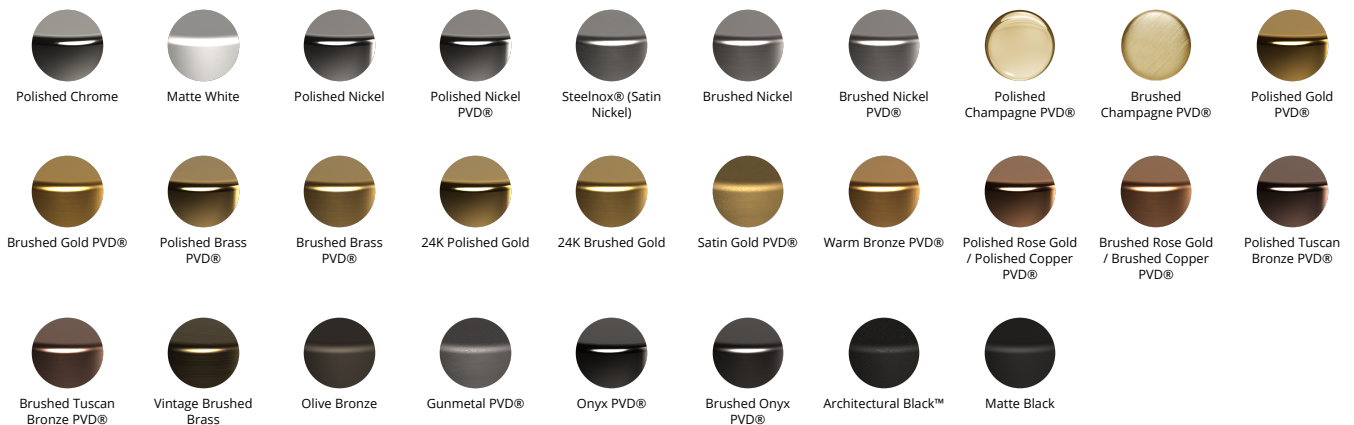

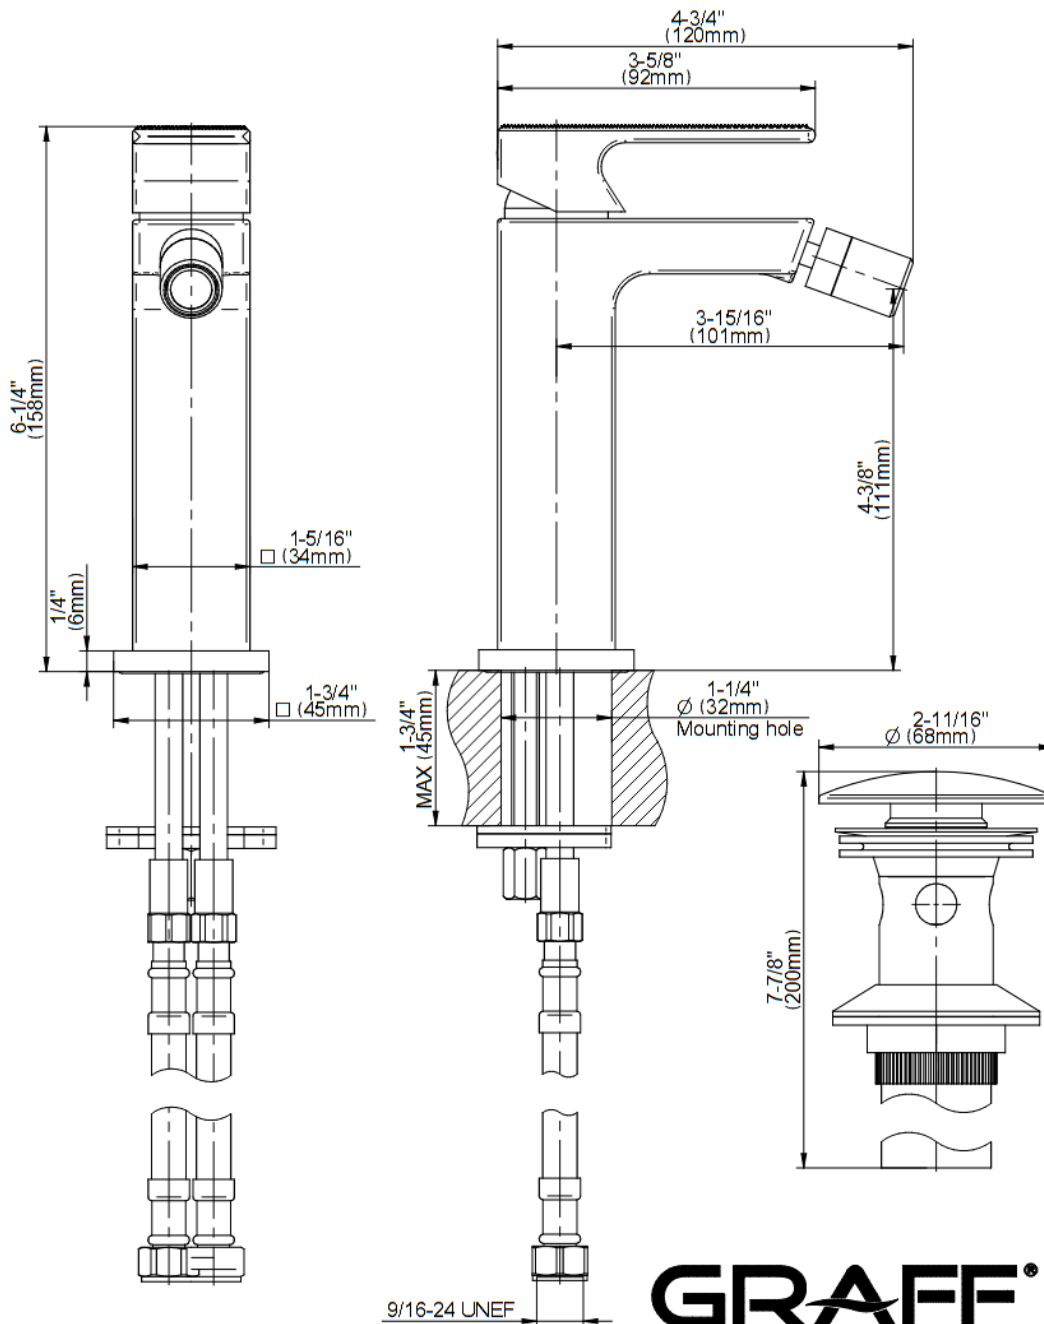

GRAFF®