



H-G244PR - G-Series E-X-P Ultra-Compact Tankless Water Heater Service Valve Kits


H-G244WPR Series

G-Series E-X-P Ultra Compact

Tankless Water Heater Service Valve Kit
Hot & Cold Set of Full Port Forged DZR Brass Ball Valves
w/ 3/4" Hose Drains & Pressure Relief Valve Outlet
Includes LF Residential PRV (150 PSI/ 1.163M BTU/HR)
Requires (2) G-Union Fittings (Sold Separately)
Lead-Free

Certifications





Certified to NSF/ANSI 61 & 372 - Applies to base model H-G244W

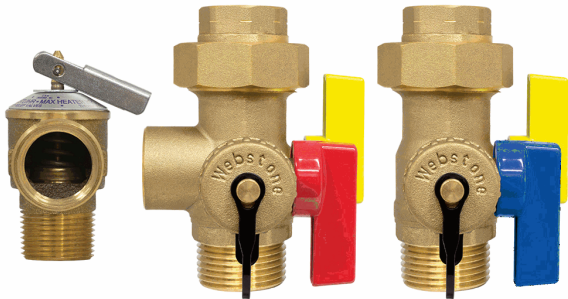

Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D	E	F	
FIP Union x G-Thread											200 PSI CWP Max
3/4" x 1"	H-G2444W-RPR	3.04	1	12	0.75	4.30	2.67	3.26	3.80	0.75	200°F Max


HOT

COLD

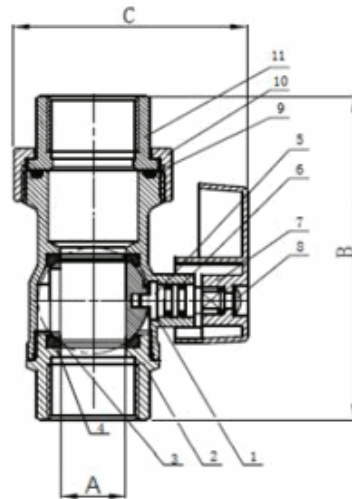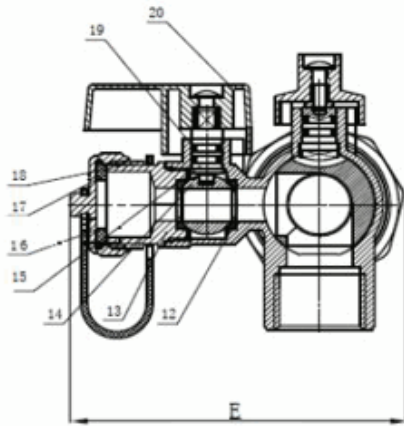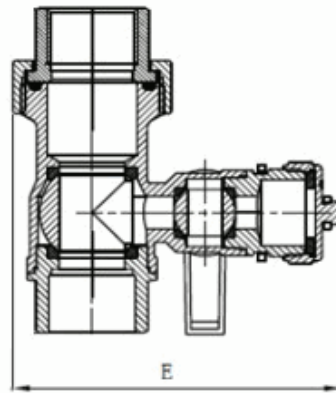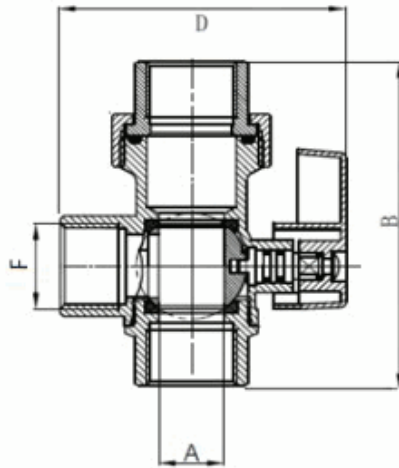

NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	Cap	Lead-Free DZR Brass
3	Ball	Brass HCP
4	Ball Seat	PTFE
5	Spindle	Brass
6	O-Ring	EPDM
7	Lever Handle	Aluminum
8	Screw	Steel
9	O-Ring	EPDM
10	Union Nut	Brass
11	Adaptor	Lead-Free DZR Brass
12	Ball Seat	PTFE
13	Cap	Lead-Free DZR Brass
14	Ball	Brass HCP
15	Spindle	Brass
16	Cap	Brass
17	Gasket	EPDM
18	Strap	PVC
19	O-Ring	EPDM
20	Lever Handle	Aluminum
21	Pressure Relief Valve	See Inset

Pressure Relief Valve

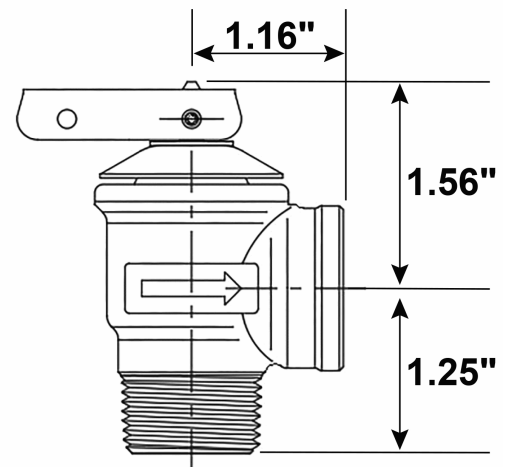

Specifications: Designed for use with water, oil, glycol mix in residential or commercial pumping and heating systems. Threaded (NPT) ends comply with ANSI B1.20.1. G-threaded bodies require matching G-union fitting for installation.

REV:12/17/2025

LEAD-FREE: Weighted
average lead content $\leq 0.25\%$

WWW.WEBSTONEVALVES.COM



WARNING: Cancer and Reproductive
Harm - www.P65Warnings.ca.gov