



H-x-G244PR - E-X-P Ultra-Compact Tankless Water Heater Service Valve Kits

H-x-G244WPR Series

E-X-P Ultra-Compact Tankless Water Heater Service Valve Kit

Hot & Cold Set of Full Port Forged DZR Brass Ball Valves

w/ 3/4" Hose Drains & G-Union Fittings

& Pressure Relief Valve Outlet

Includes LF Residential PRV


(150 PSI / 1.163M BTU/HR)

Lead-Free





Certifications

Certified to NSF/ANSI 61 & 372 - Applies to base model H-G244W

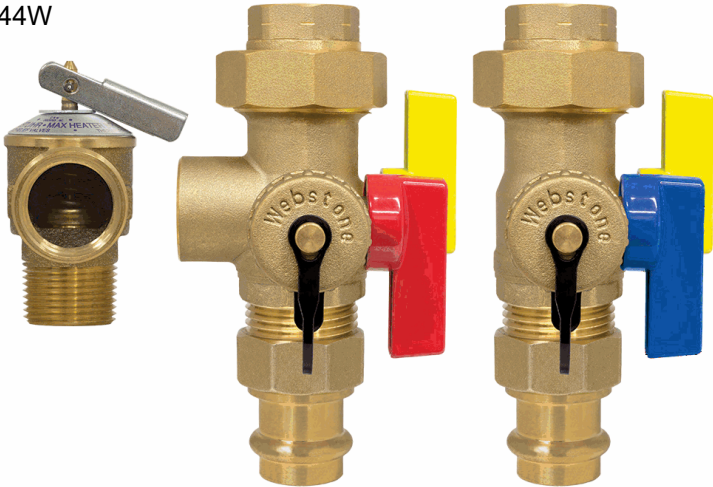


Size (in)	Item#	Weight (lbs)	CTN Qty	Case Qty	A	B	C	D	E	F	G	
FIP Union x Press										200 PSI CWP Max		200°F Max
3/4"	H-8-G2443WPR	3.88	1	12	0.75	4.30	2.67	3.26	3.80	0.75	5.67	

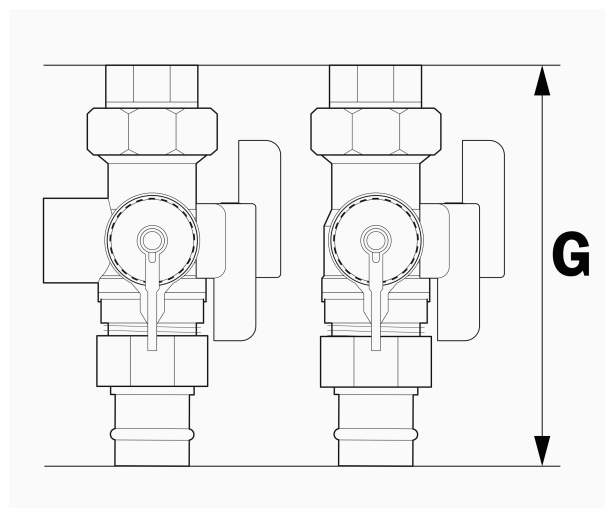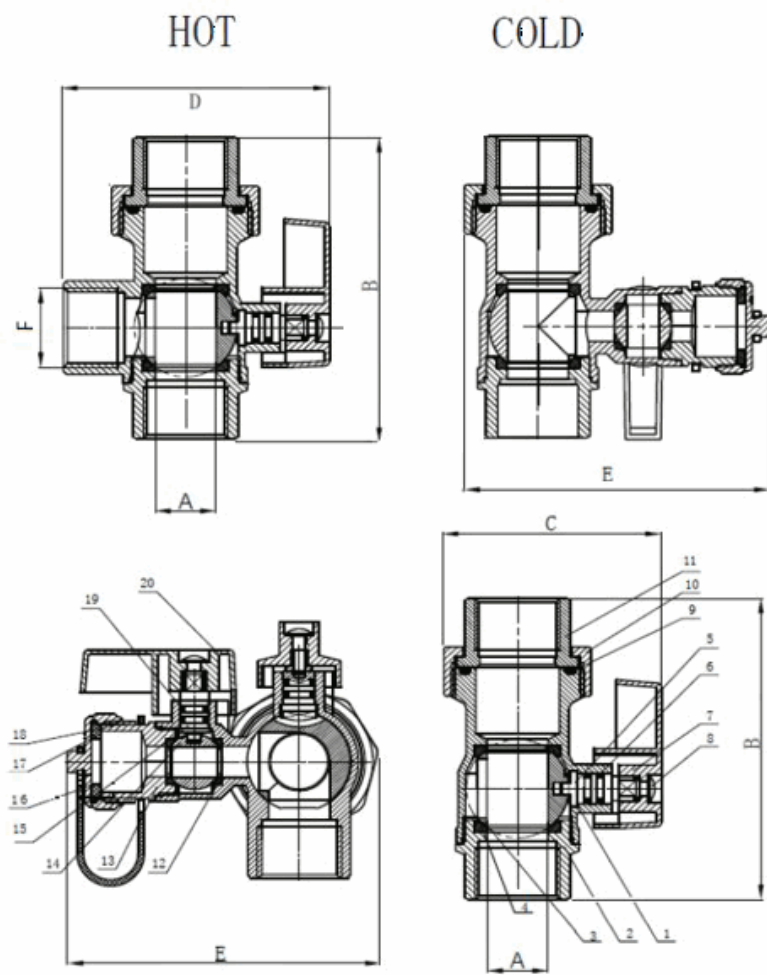

G-Union End(s)

Union Tailpiece:
Lead-Free DZR Brass

Gasket:
EPDM

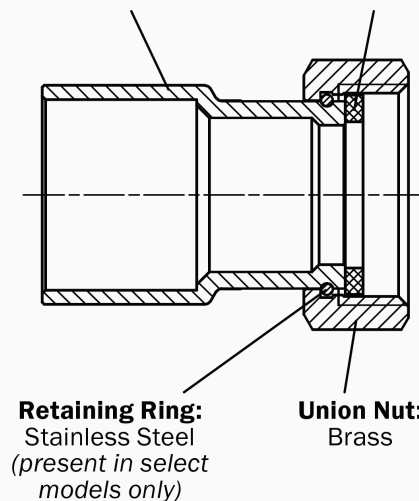


Retaining Ring:
Stainless Steel
(present in select
models only)

Union Nut:
Brass

NO.	DESCRIPTION	MATERIAL
1	Body	Lead-Free DZR Brass
2	Cap	Lead-Free DZR Brass
3	Ball	Brass HCP
4	Ball Seat	PTFE
5	Spindle	Brass
6	O-Ring	EPDM
7	Lever Handle	Aluminum
8	Screw	Steel
9	O-Ring	EPDM
10	Union Nut	Brass
11	Adaptor	Lead-Free DZR Brass
12	Ball Seat	PTFE
13	Cap	Lead-Free DZR Brass
14	Ball	Brass HCP
15	Spindle	Brass
16	Cap	Brass
17	Gasket	EPDM
18	Strap	PVC
19	O-Ring	EPDM
20	Lever Handle	Aluminum
21	G-Union End(s)	See Inset
22	Pressure Relief Valve	See Inset

Pressure Relief Valve

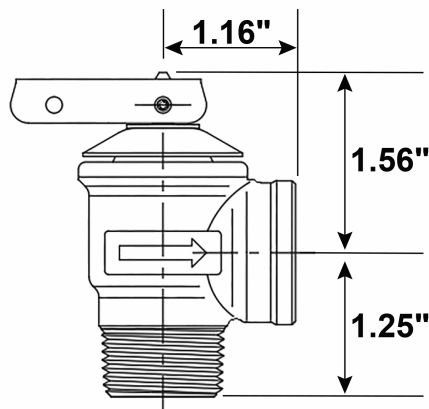

Specifications: Designed for use with water, oil, glycol mix in residential or commercial plumbing and heating systems. Threaded (NPT) ends comply with ANSI B1.20.1. EPDM o-rings for press ends.

REV:12/17/2025

LEAD-FREE: Weighted
average lead content $\leq 0.25\%$

WWW.WEBSTONEVALVES.COM



WARNING: Cancer and Reproductive
Harm - www.P65Warnings.ca.gov