

## H-x244PR - E-X-P Ultra-Compact Tankless Water Heater Service Valve Kits

### H-x244WPR Series

### E-X-P Ultra-Compact Tankless Water Heater Service Valve Kit

Hot & Cold Set of Full Port Forged DZR Brass Ball Valves

w/ 3/4" Hose Drains

& Pressure Relief Valve Outlet

Includes LF Residential PRV


(150 PSI / 1.163M BTU/HR)

Lead-Free

### Certifications


Certified to NSF/ANSI 61 & 372, NSF/ANSI 14 - Applies to base model

H-x244W

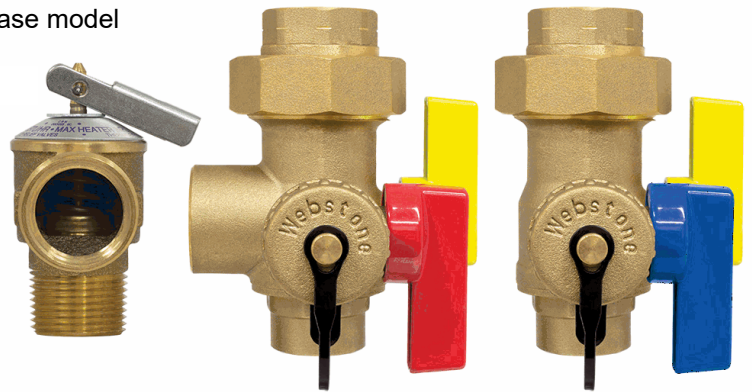


| Size<br>(in)                  | Item#      | Weight<br>(lbs) | CTN<br>Qty | Case<br>Qty | A    | B    | C    | D    | E    | F    |                 |           |
|-------------------------------|------------|-----------------|------------|-------------|------|------|------|------|------|------|-----------------|-----------|
| FIP Union x F1807 PEX<br>3/4" | H-12443WPR | 3.25            | 1          | 12          | 0.75 | 4.12 | 2.67 | 3.26 | 3.80 | 0.75 | 250 PSI CWP Max | 200°F Max |
| FIP Union x F1960 PEX<br>3/4" | H-32443WPR | 3.36            | 1          | 12          | 0.75 | 4.42 | 2.67 | 3.26 | 3.80 | 0.75 | 250 PSI CWP Max | 200°F Max |
| FIP Union x FIP<br>3/4"       | H-42443WPR | 3.70            | 1          | 12          | 0.75 | 3.87 | 2.67 | 3.26 | 3.80 | 0.75 | 250 PSI CWP Max | 200°F Max |
| FIP Union x SWT<br>3/4"       | H-52443WPR | 3.64            | 1          | 12          | 0.75 | 3.87 | 2.67 | 3.26 | 3.80 | 0.75 | 250 PSI CWP Max | 200°F Max |



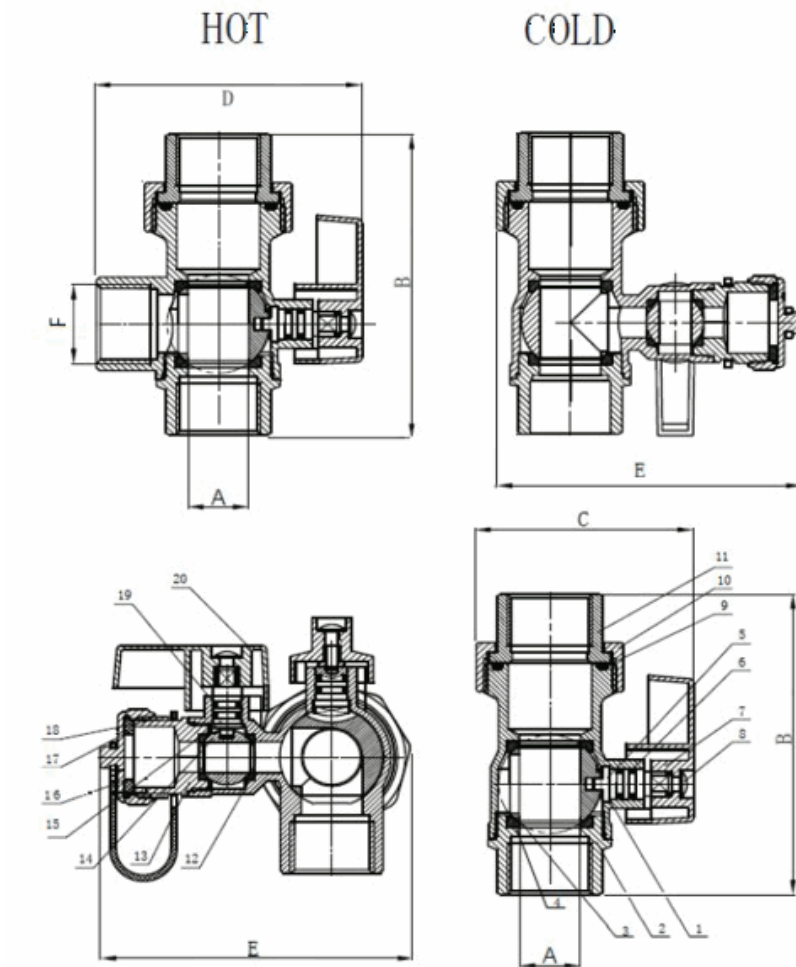

## Pressure Relief Valve

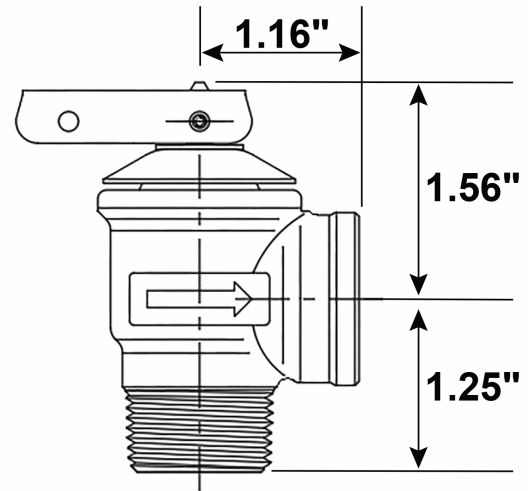

| NO. | DESCRIPTION           | MATERIAL            |
|-----|-----------------------|---------------------|
| 1   | Body                  | Lead-Free DZR Brass |
| 2   | Cap                   | Lead-Free DZR Brass |
| 3   | Ball                  | Brass HCP           |
| 4   | Ball Seat             | PTFE                |
| 5   | Spindle               | Brass               |
| 6   | O-Ring                | EPDM                |
| 7   | Lever Handle          | Aluminum            |
| 8   | Screw                 | Steel               |
| 9   | O-Ring                | EPDM                |
| 10  | Union Nut             | Brass               |
| 11  | Adaptor               | Lead-Free DZR Brass |
| 12  | Ball Seat             | PTFE                |
| 13  | Cap                   | Lead-Free DZR Brass |
| 14  | Ball                  | Brass HCP           |
| 15  | Spindle               | Brass               |
| 16  | Cap                   | Brass               |
| 17  | Gasket                | EPDM                |
| 18  | Strap                 | PVC                 |
| 19  | O-Ring                | EPDM                |
| 20  | Lever Handle          | Aluminum            |
| 21  | Pressure Relief Valve | See Inset           |

Specifications: Designed for use with water, oil, glycol mix in residential or commercial plumbing and heating systems. Threaded (NPT) ends comply with ANSI B1.20.1. Solder joint temperature ratings are per ASME B16.18 Annex A for 95-5 solder. Do not silver braze or overheat valves when soldering. PEX ends are in accordance with the referenced ASTM specification; refer to tubing manufacturer for installation instructions.

REV:12/17/2025

LEAD-FREE: Weighted  
average lead content  $\leq 0.25\%$

WWW.WEBSTONEVALVES.COM



**WARNING:** Cancer and Reproductive  
Harm - www.P65Warnings.ca.gov