



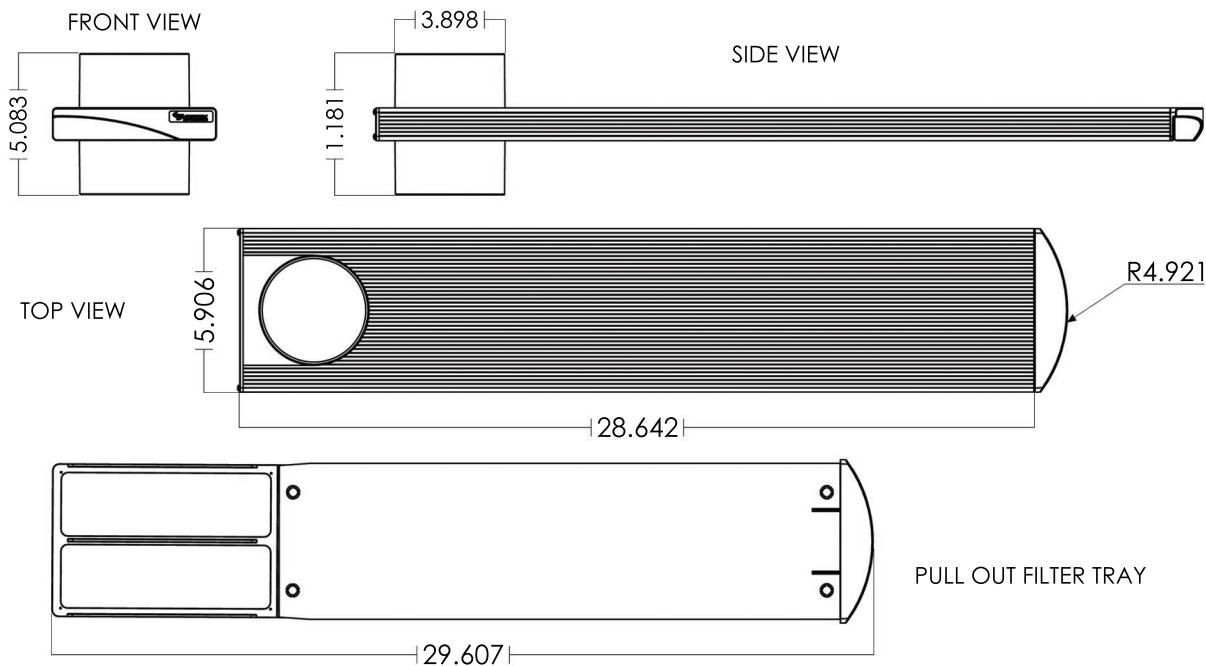

INSTALLATION INSTRUCTIONS

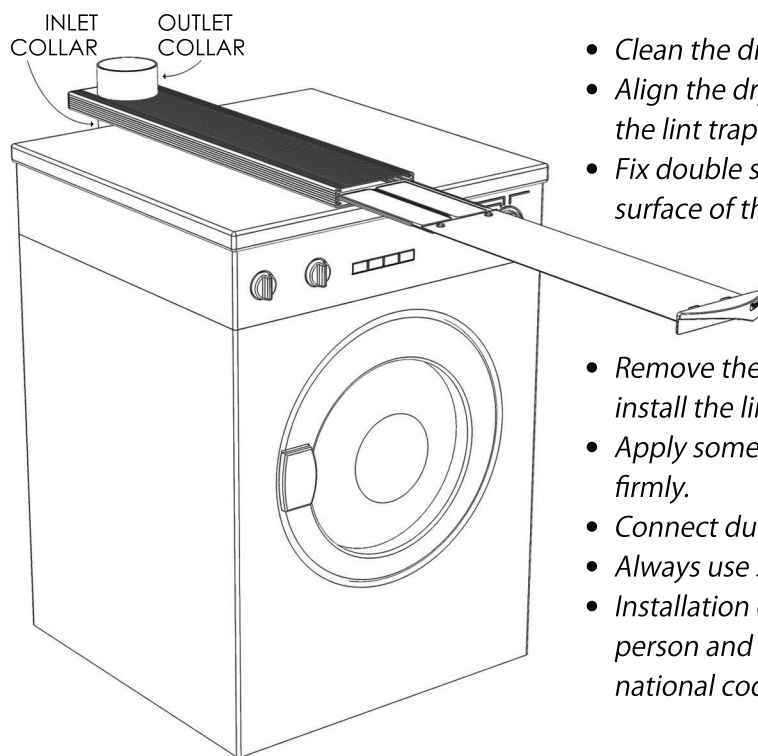

- Clean the dryer top surface properly before installation.
- Align the dryer exhaust with the lint trap collar and mark the lint trap position on the top of the dryer.
- Fix double sided foam tape (not supplied) on the bottom surface of the lint trap.
- Remove the remaining side of the foam tape strips and install the lint trap on the dryer top surface as marked.
- Apply some force downwards on the lint trap to hold it firmly.
- Connect duct to inlet and outlet collar.
- Always use solid metal pipe.
- Installation of the lint trap must be done by a qualified person and be in accordance with all municipal and national codes and standards.

IMPORTANT: CLEAN LINT TRAP BEFORE EVERY DRYER CYCLE



2480 Boul. des Entreprises Terrebonne, Quebec J6X 4J8 CANADA
T: 450.477.1100 F: 514.313.5700 TF: 1.800.489.1301
WWW.ATMOSPHERE.COM

FEBRUARY 2020

Customer support : info@atmosphere.com
Sales inquiries : sales@atmosphere.com

Panasonic

Panasonic is the exclusive distributor of
Atmosphere products in the US

Panasonic IAQ Division
Two Riverfront Plaza
Newark, NJ 07102
na.panasonic.com/us/iaq

For Order Information
PHONE: 866-292-7299
FAX: 888-553-0723
ventfans@us.panasonic.com

Design and specifications subject to change without notice.