



Model(s) ZG6922

AquaSense® Wall Mount 5-3/8 in. Gooseneck Sensor Faucet With Gear-driven Ceramic Cartridge

TAG

Architectural/Engineering Specification:

Zurn AquaSense® Back-Mounted Sensor Faucets create a more hygienic, sustainable, and reliable restroom experience by utilizing gear-driven ceramic cartridge operation with no solenoids to replace and renewable hydropower. The standard high-efficiency, 0.5 gpm low-flow rate and adjustable timeout feature help save water to meet sustainability goals. Customize usage settings wirelessly by using Zurn Elkay's Bluetooth app, PlumbPro. Upgrade to the smart device version for fleet management, including real-time data. Zurn Lead Free products are durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.

PRODUCT FEATURES:

- Uses EZ Gear technology, a motor gear-driven ceramic cartridge that is less susceptible to debris and buildup for easy maintenance; outlasts and outperforms solenoids
- Hydro X Power® technology delivers sustainable performance by providing renewable, uninterrupted hydropower designed to last the life of a commercial restroom.
- Intuitive and effortless, no-delay touchless sensor water activation
- Bluetooth-enabled for point-of-use wireless adjustability: Adjustable Time Out Feature (30-second default time out), Hygienic Line Flushing (on-demand or programmed), Sensing modes (on-demand or metering), Sensor Range Adjustment and Battery Status
- plumbSMART connected option available with suffix -W2 for remote monitoring and real-time usage insights to your connected plumbing ecosystem
- Shipped standard with high-efficiency water flow rates of 0.5 GPM; other flow rates available
- Quiet water flow and soft-close technology that eliminates water hammer

SUFFIX OPTIONS:

☐	-MV	Temperature Mixing Valve
☐	-SH	Three Supply Hoses for Mixing Valve
☐	-SSH	Single Supply Hose
☐	-TMV-1	Thermostatic Mixing Valve for Single Faucets (ASSE Listed 1070)

POWER OPTIONS:

Power Supply Option		
☐	-ACA	6-VDC plug-in power converter
☐	-CWB	Connector wire for hardwire power converter

AERATOR OPTIONS:

	Suffix	Flowrate GPM [L]	Vandal- Resistant	WaterSense® Labeled	Outlet Type
☐	-FC1.0	1.0 GPM [3.8L]	x		Laminar
☐	-FC	0.5 GPM [1.9L]	x		Laminar
☐	-FC1.5	1.5 GPM [5.7L]	x		Laminar
☐	-Standard		x		Spray
☐	-E	1.5 GPM [5.7L]	x	x	Aerator
☐	-J	1.5 GPM [5.7L]	x	x	Laminar
☐	-K	1.0 GPM [3.8L]	x	x	Laminar
☐	-L	1.0 GPM [3.8L]	x	x	Aerator
☐	-M	0.35 GPM [1.3L]	x		Spray
☐	-N	0.5 GPM [1.9L]	x		Laminar



Product Compliance:

ADA
ASME A112.18.1/CSA B125.1
CEC
IPC
NSF 61
NSF 372
WaterSense

*Complies with ADA & ICC A117.1 accessibility requirements when installed according to the requirements outlined in these standards.



*This product should be used with a WaterSense labeled counterpart with a compatible flow volume to ensure that the entire system meets the requirements for water efficiency and performance.

*Although products with certain combinations of options and features will meet or comply with these standards and/or certifications, not every combination of options and features will result in such compliance. If you have any questions about your particular product, please contact our Customer Care Dept. at 1-855-ONE-ZURN (United States) or 1-877-892-5216 (Canada) for confirmation.

[Installation Guide - FV847](#)

[Warranty - general-terms-and-conditions.pdf \(PDF\)](#)

Architectural/Engineering Approval

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠ WARNING: Cancer and Reproductive Harm – www.P65warnings.ca.gov

⚠ ADVERTENCIA: Cáncer y daño reproductivo – www.P65warnings.ca.gov

⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov



Model(s) ZG6922

AquaSense® Wall Mount 5-3/8 in. Gooseneck Sensor Faucet With Gear-driven Ceramic Cartridge


TAG

TYPICAL ZG6922

HYDROPOWER WITH BATTERY BACKUP POWERED FAUCET

NOTE: RECOMMENDED THROUGH HOLE DIAMETER TO PROPERLY MOUNT THE SPOUT/SHANK IS 1-1/8" TO 1-1/4".

*HYDROGENERATOR CAN BE INSTALLED ABOVE OR BELOW THE ELECTRONICS MODULE.

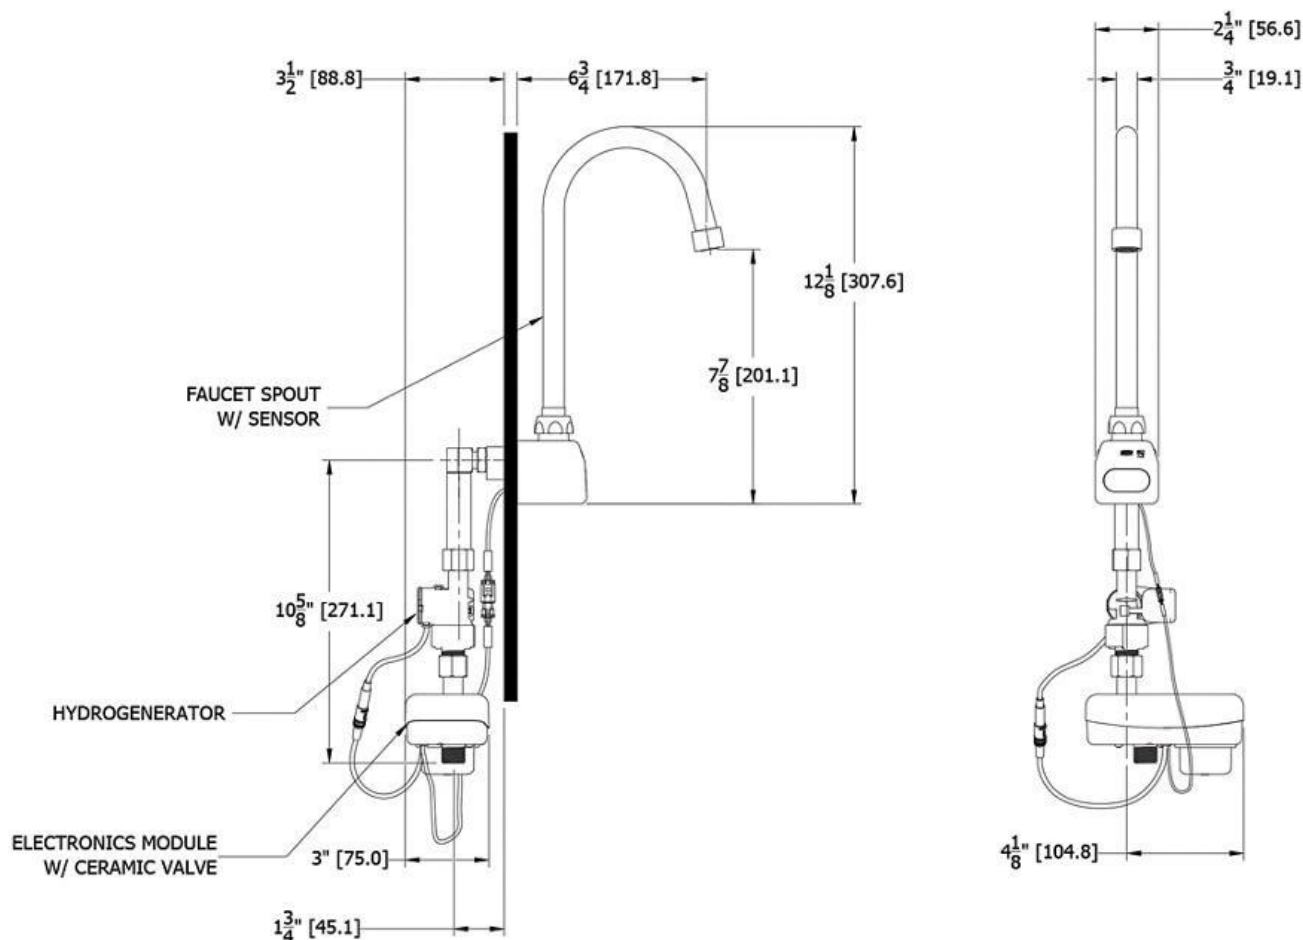

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠ WARNING: Cancer and Reproductive Harm – www.P65warnings.ca.gov

⚠ ADVERTENCIA: Cáncer y daño reproductivo – www.P65warnings.ca.gov

⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov




Model(s) ZG6922

AquaSense® Wall Mount 5-3/8 in. Gooseneck Sensor Faucet With Gear-driven Ceramic Cartridge

TAG _____

TYPICAL ZG6922-ACA

PLUG-IN WITH BATTERY BACKUP POWERED FAUCET

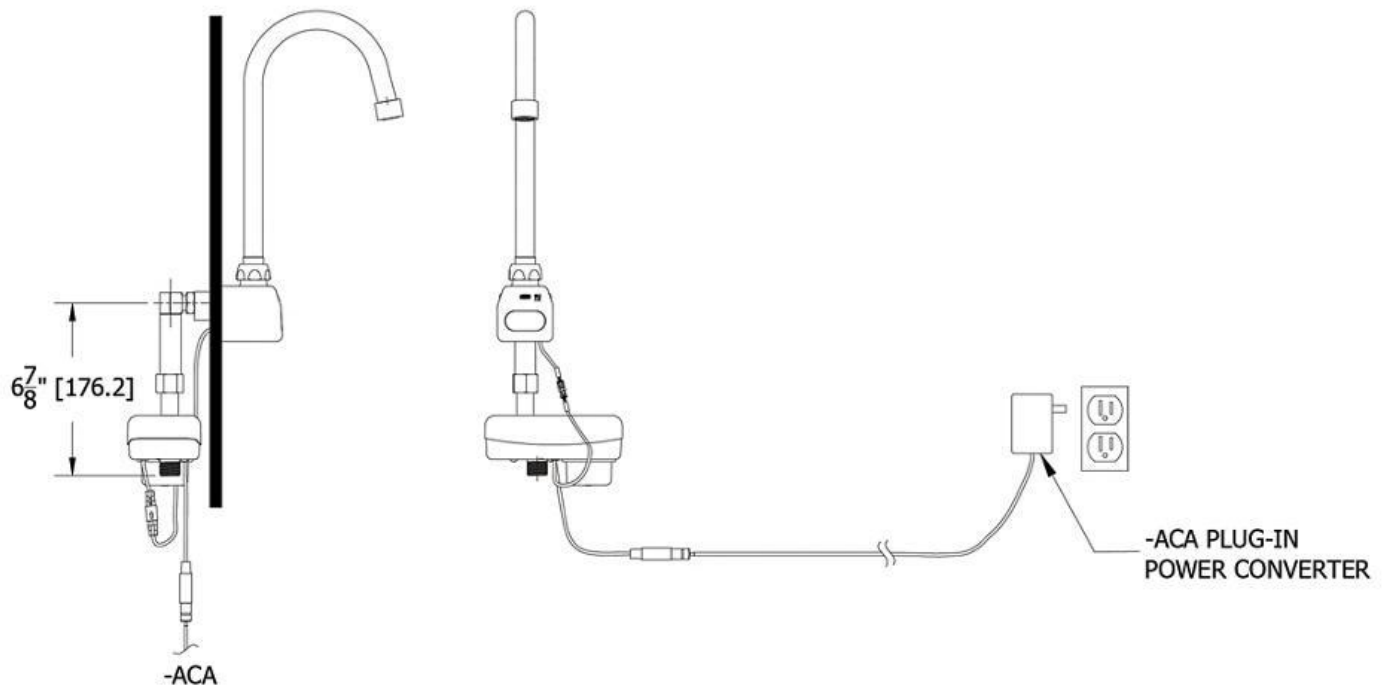

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠ WARNING: Cancer and Reproductive Harm – www.P65warnings.ca.gov
⚠ ADVERTENCIA: Cáncer y daño reproductivo – www.P65warnings.ca.gov
⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov




Model(s) ZG6922

AquaSense® Wall Mount 5-3/8 in. Gooseneck Sensor Faucet With Gear-driven Ceramic Cartridge

TAG _____

TYPICAL ZG6922-CWB

HARDWIRE WITH BATTERY BACKUP POWERED FAUCET

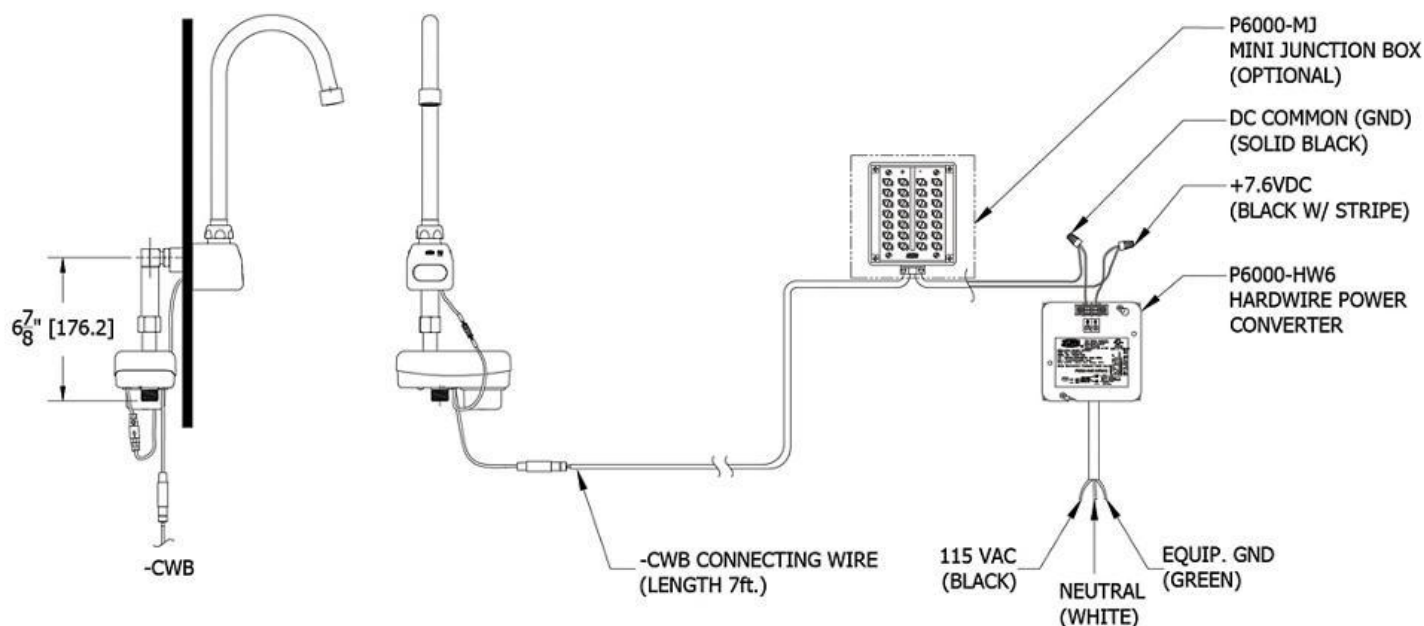

NOTE: All dimensions are for reference only. Do not use for pre-plumbing.

Design and dimensional data (inches and [mm]) are subject to manufacturing tolerances and change without notice.

⚠ WARNING: Cancer and Reproductive Harm – www.P65warnings.ca.gov
⚠ ADVERTENCIA: Cáncer y daño reproductivo – www.P65warnings.ca.gov
⚠ AVERTISSEMENT: Cancer et effets néfastes sur la reproduction – www.P65warnings.ca.gov